


# HFR/M MULTI-CONNECTION CABIN UNIT

For suites and other larger spaces

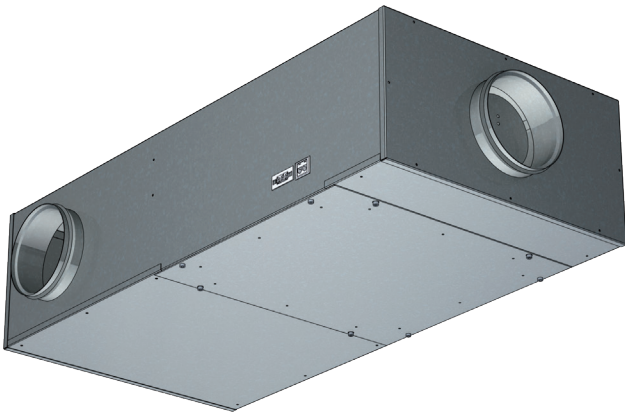

## MATERIALS

PART	MATERIAL	FINISHING
Casing	Hot galvanised steel	Available as an option: stainless steel EN 1.4404 (AISI316L)
Spigots	Hot galvanised steel and EPDM rubber	Available as an option: stainless steel EN 1.4404 (AISI316L)
Insulation	Mineral wool, s=25 mm, MED approved	-
I/O unit	Aluminium/plastic/electronics	-
Reheat coil	Stainless steel EN 1.4301 (AISI304)	-
Cables	Halogen-free	-
Airflow measurement probes and tubes	Aluminium / polyurethane	-

## HFR/M PRODUCT OPTIONS

- Pressure independent model (VAV/CAV)
- Pressure dependent model (VAV)
- Inputs for external switches such as balcony door and key card switches available as an option
- Network compatible with adapter for advanced energy efficiency and supervision system available as an option
- Energy efficiency functions to reduce unnecessary cooling / heating costs available as an option

## APPLICATIONS

Halton HFR/M is pressure independent or pressure dependent single duct cabin unit with 1-3 outlet connections for terminal units. Pressure independent VAV or CAV operation is facilitated by continuous airflow measurement and damper regulation by intelligent controller. Pressure independent HMF adapts to variations in supply ductwork pressure levels and maintains individual fresh supply airflow rate to each cabin. Pressure dependent VAV operation is facilitated only by damper regulation by intelligent controller. Pressure dependent HMF adapts to room temperature changes by regulating airflow between pre-set minimum and maximum damper positions. Halton HFR/M is an excellent choice for suites, deluxe cabins and office areas where the total airflow needs to be distributed to several points, but controlled centrally with one control panel.

## FEATURES




- Pressure range from 200 Pa up to 1000 Pa
- Airflow range 175 m<sup>3</sup>/h...1000 m<sup>3</sup>/h
- 230 VAC ±10%, 50/60 Hz
- Inbuilt airflow measurement (pressure independent models)
- Damper min. / max. position settings (pressure dependent models)
- Triac controlled reheating coil(s), adjustable heating power (PWM) 0...100%
- Master/slave functionality: several cabin units can be controlled by one control panel
- Internal fuses included
- All parameters can be set onsite during commissioning by external device or preset at the factory
- All cable connections with fast connectors
- Easily tailored for different types of installations
- 90 °C safety switch with state detection and manual reset
- Minimum flow alarm (pressure independent model) and inbox temperature measurement with overheat limit to cut-off reheater power
- HFR/M cabin unit is supplied with control panel and interconnection cable

**AVAILABLE REHEATERS**

- Standard reheaters: 400W, 800W, 400W+800W, 1200W, 1500W, 1800W
- Offshore reheaters: 400W, 800W, 1200W, 1600W (surface temperature below 90 °C on operating airflow)

Practical power level may be software adjusted cabin by cabin. Cable and power supply design has to be done according to maximum available heating power.

**GENERAL HFR/M DRAWINGS**

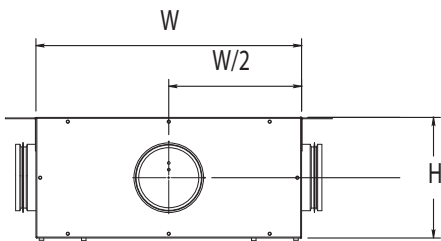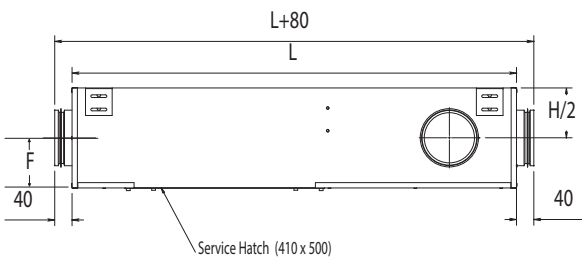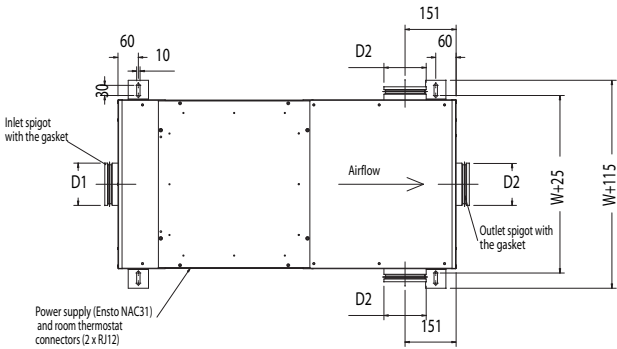

**HFR/M DIMENSIONS**

	D1/D2 (DN)	L	W	H	F
HFR/M-125	125	1000	500	225	99
HFR/M-160	160	1000	500	250	121
HFR/M-200	200	1000	500	300	136


**FUNCTION**

The control panel also includes many special features such as a diagnostics function, room brightness measurement, and re-programmability. The power supply and data transfer between the cabin unit and control panel is carried out via interconnection cable. The temperature range is software adjustable between 10°C and 30°C.

**FUNCTION OF VAV UNIT**

When a passenger demands a lower temperature by using a control panel unit, the damper opens to increase the flow of cold air towards the maximum value. When the required temperature in the cabin is achieved, the damper reference is held until the temperature demand changes. In heating mode, the damper restricts the airflow towards its minimum rate, and if the required temperature in the cabin is not thus achieved, the controller activates the electric reheater inside the unit in a stepless manner.


**REGULATION DIAGRAM, VAV**

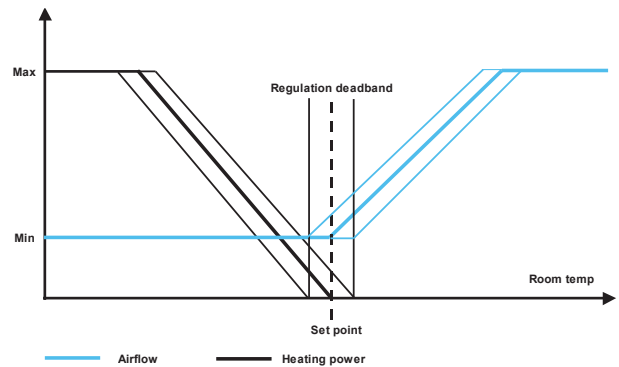

**FUNCTION OF CAV UNIT**

Airflow is kept at a pre-set level in any condition. When a passenger demands a higher temperature by using a control panel, the electric reheater inside the cabin unit will be activated in a stepless manner towards maximum heating capacity or until the desired temperature is achieved. When a lower temperature is demanded, the electric reheater inside the unit will be deactivated in a stepless manner towards zero heating capacity or until the desired temperature is achieved.

**REGULATION DIAGRAM, CAV**

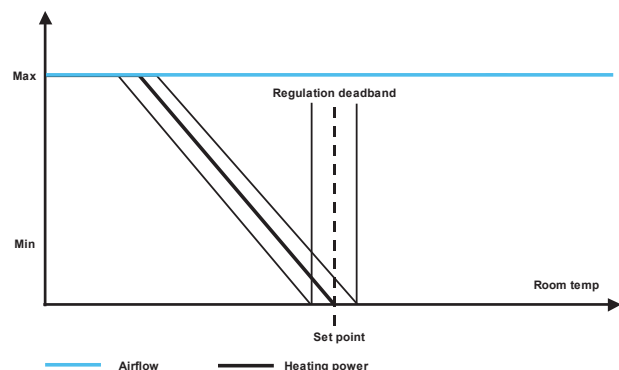

**OPERATING RANGE FOR HFR/M**

HFR/M-125	HFR/M-160	HFR/M-200
175 m³/h - 500 m³/h	250 m³/h - 800 m³/h	350 m³/h - 1000 m³/h

**CABIN UNIT'S AIRFLOW MEASUREMENT**

Accuracy*	AIRFLOW (m³/h)		
	175-300	300-600	600-1000
	±15%	±10%	±8%

\*ductwork pressure 200-1000 Pa (optimal)

Note: When comparing airflow measurements between cabin unit and other device, cabin unit's airflow regulation dead-band has to be taken into account (6 10 m3/h).

**CONTROL PANEL FEATURES**

Halton Marine HFR/M cabin units are available with three different control panel models; with rotating knob, push buttons with LED bar graph (available as option: IP54) and push buttons with LCD-display (available as option: IP54).

**COMMON FEATURES**


- Cabin temperature measurement
- Connector for bluetooth / communication adapter to set cabin parameters
- Software for parameter setting and trouble shooting
- Different colour options and custom labeling available as an option
- Delivered with IC-Cable (interconnection cable)
  - For control panel - cabin unit connection
  - Prefabricated with plugs on both ends
  - Cable plug on panel side is designed to be pulled through standard installation pipe
- Halogen free and flame-retardant
- Standard length 7 meters. Other lengths available.

**CONTROL PANEL WITH ROTATING KNOB**

- Temperature adjustment by rotating knob

**CONTROL PANEL WITH PUSH BUTTONS AND LED BAR GRAPH**

- Temperature adjustment by push buttons
- Self diagnose function
- LED intensity control and auto dimming

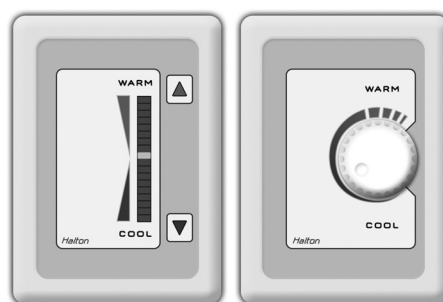

Control panel models; push button and rotating knob



LCD control panel

**CONTROL PANEL WITH PUSH BUTTONS AND LCD-DISPLAY**

- Temperature adjustment by buttons
- Self diagnose function
- LCD intensity control and auto dimming
- Display for actual and set point temperatures available as an option
- Time display available as an option
- A customized background picture available as an option
- Several frame options available

**CABIN VENTILATION CONFIGURATION TABLE**

	UNIT	HMM	HMM	HME	HME	HMF	HMF	HMF	HFR/M	HFR/M	HFR/M	HMR	HMR	HML	
	CONTROL PACKAGE	K01	D03	K01	D03	M00	M01	M02	M00	M01	M02	D21	H21	B00	
TERMINAL UNIT WITH JUNCTION BOX	Damper	Manual	Manual	Manual	Manual	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	
	Airflow measurement and control (VAV, CAV)	No	No	No	No	Yes	No	Yes	Yes	No	Yes	Yes	Yes	Yes	
	In-box temperature measurement	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes	
	Reheater safety switch, manual reset	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes
	Safety switch state detection	No	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	Yes
	Spare inputs (balcony door etc.)	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Parameter setting by service tool	No	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CONTROL PANEL	Cabin temperature measurement	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Controller with push buttons, 18 led bar	No	Yes	No	Yes	Yes	No	No	Yes	No	No	Yes	No	Yes	
	Controller with knob	Yes	No	Yes	No	No	Yes	Yes	No	Yes	Yes	No	Yes	No	
	LCD room thermostat	No	Optional	No	Optional	Optional	No	No	Optional	No	No	Optional	No	Optional	
	LED intensity control and auto dimming	No	Yes	No	Yes	Yes	No	No	Yes	No	No	Yes	No	Yes	
	Self diagnose functionality	No	Yes	No	Yes	Yes	No	No	Yes	No	No	Yes	No	Yes	
	Network compatible with adapter	No	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
CO2 sensor available as an option	No	Yes	No	Yes	Yes	No	No	Yes	No	No	Yes	No	Yes		
CABLES	Interconnection cable	IC4-X	IC6-X	IC4-X	IC6-X	IC6-X	IC6-X	IC6-X	IC6-X	IC6-X	IC6-X	IC6-X	IC6-X	IC6-X	
	Master-slave cable	MS4-X	MS2-X	MS4-X	MS2-X	MS2-X (MS5-X)	MS3-X	MS3-X	MS2-X (MS5-X)	MS3-X	MS3-X	MS2-X	MS3-X	MS2-X	

Please note: HMM and HME units are also available without a control package.

**MANUALLY CONTROLLED AIRLOWS**

- Single duct units; HMM, HME

**PRESSURE DEPENDENT UNITS**

- Single duct units; HMF, HFR/M

**PRESSURE INDEPENDENT UNITS**

- Single duct units; HMF, HFR/M, HML
- Dual duct units; HMR

**ACCESSORIES FOR HFR/M CABIN UNITS****MS-CABLE (MASTER-SLAVE CABLE)**

- For master cabin unit - slave cabin unit/units connection
- Prefabricated with plugs on both ends
- Halogen free and flame-retardant
- Standard length is 7 meters. Other lengths available as an option.

**COMMUNICATION ADAPTER**

- Bluetooth communication to external device
- For wireless connection to set cabin unit parameters and trouble shooting


**NETWORK ADAPTERS**

- Network adapter (also available as WiFi) expands a stand-alone unit to network compatible unit (LON or Ethernet network)
- Enables supervision and advanced energy efficiency functions
- For more information, see Halton Networks for cabin ventilation -brochure or contact Halton Marine Sales office.


**PERFORMANCE DATA**

**SOUND LEVELS, CABIN SOUND ABSORPTION 4 DB(A)**


**HFR/M-125**

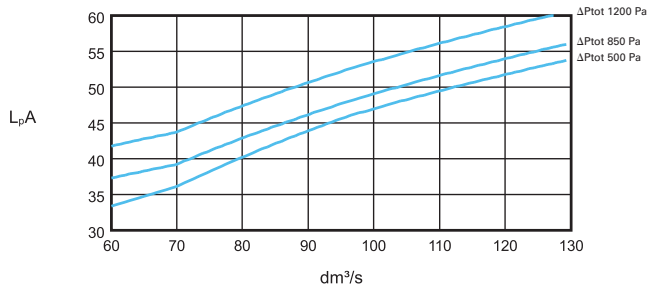

**HFR/M-200**

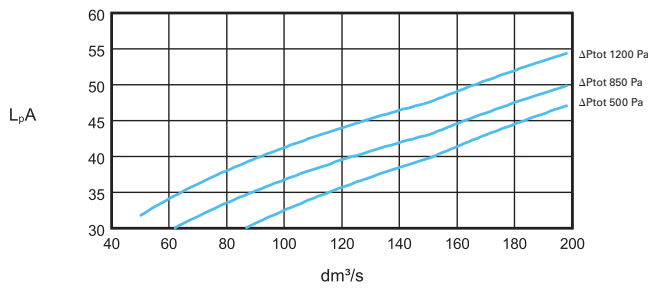


**HFR/M-160**

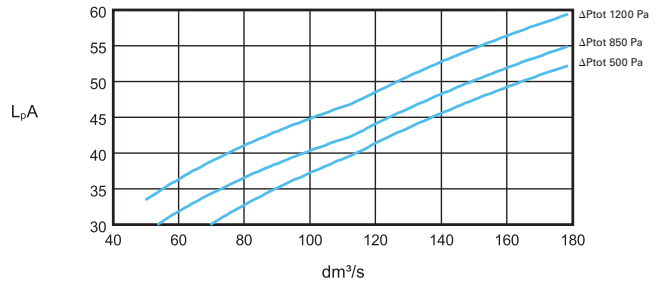


**PRESSURE DROP**

**HFR/M-125**

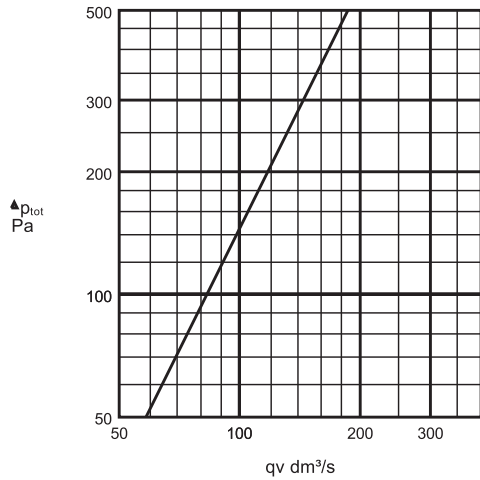

**HFR/M-160**

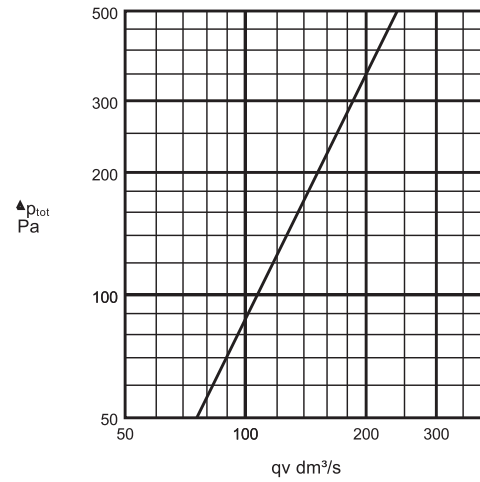

**HFR/M-200**

