

Private: Halton TDM – Ceiling diffuser (Terminated)



Overview

Terminated as of February 1st 2022 – replaced with Halton Jax Cloud Ceiling (JCC)

- Horizontal radial air supply, suitable also for exhaust
- With solid front panel
- Installation either to ductwork, balancing plenum or cabin unit
- Detachable front plate enables cleaning of the diffuser
- Circular duct connection with gasket Compatible with Halton cabin units
- Control knob for Halton manual cabin unit available as an option


Specification

Halton TDM is a circular ceiling diffuser for circular duct connections D160...250 mm. The diffuser is manufactured from steel and finished with paint in white RAL 9010 standard colour. Other colours are available on request. The galvanized steel coupling sleeve is equipped with a rubber gasket compound. The diffuser has a solid or perforated front plate. The detachable frontplate is fixed to the upper plate with springs; cleaning of the diffuser and cabin unit can be carried out through the diffuser. Halton TDM is especially designed for low spaces and is therefore an excellent choice for marine, navy and offshore applications. The TDM is fully compatible with Halton cabin units. A manual cabin unit control knob is available as an option.

Dimensions


TDM general drawings

TDM/N

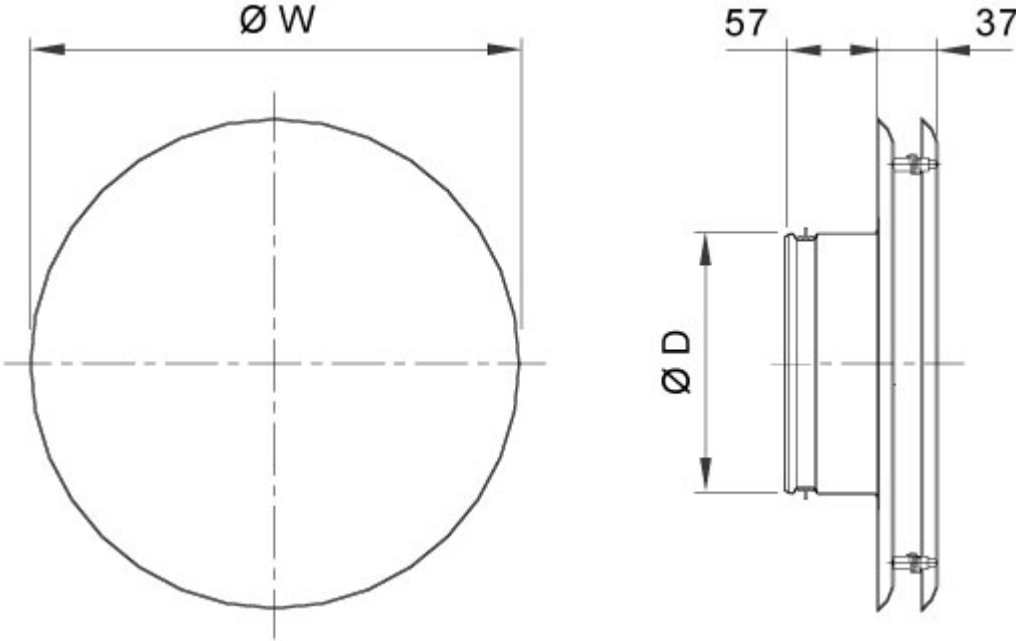

NS	W	$\varnothing D$	Weight
160	300	159	1,6 KG
200	450	199	2,8 KG
250	450	249	2,8 KG

TDM/P

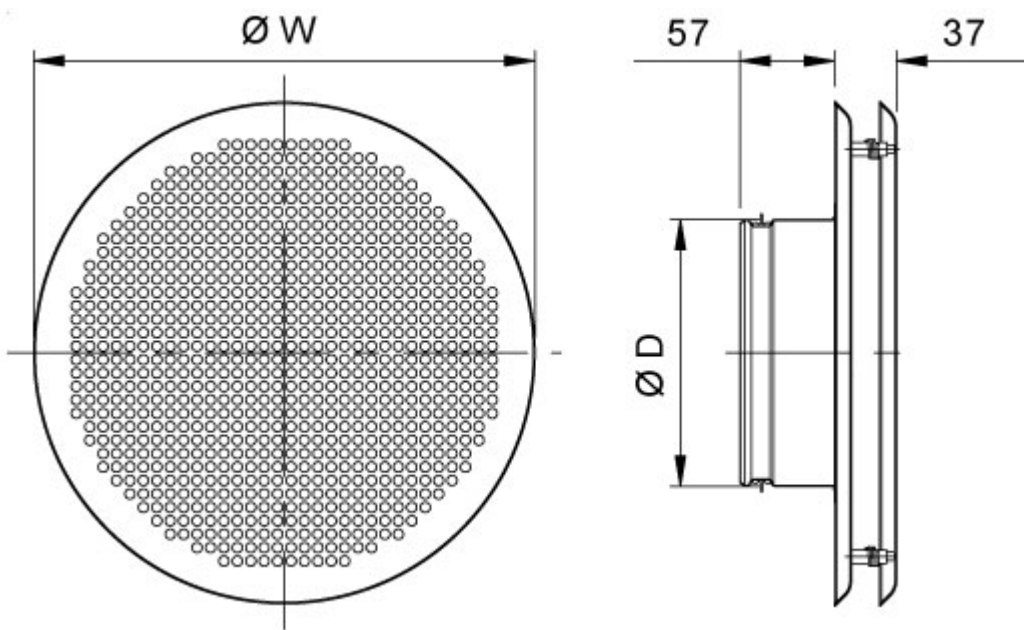

NS	W	ØD	Weight
160	300	159	1,4 KG
200	450	199	2,6 KG
250	450	249	2,6 KG

Material and Finishing

PART	MATERIAL	NOTE
Upper plate	Steel	
Front panel	Steel	TDM/N solid TDM/P perforated
Coupling sleeve	Galvanized steel	Gasket
Duct gasket	Rubber compound	
Finishing	Painted / White RAL 9010	Special colours available on request

Product Models and Accessories

Product models

TDM/N Solid front panel (without perforation)


TDM/P Perforated front panel

ACCESSORY	CODE	DESCRIPTION
Control knob	K	Control knob for Halton manual cabin unit

Function


TDM/N

Air is supplied horizontally into the space through the side slots of the diffuser and induces the room air in the vicinity of the diffuser. The recommended maximum air temperature difference between supply and room air is 10 °C degrees.

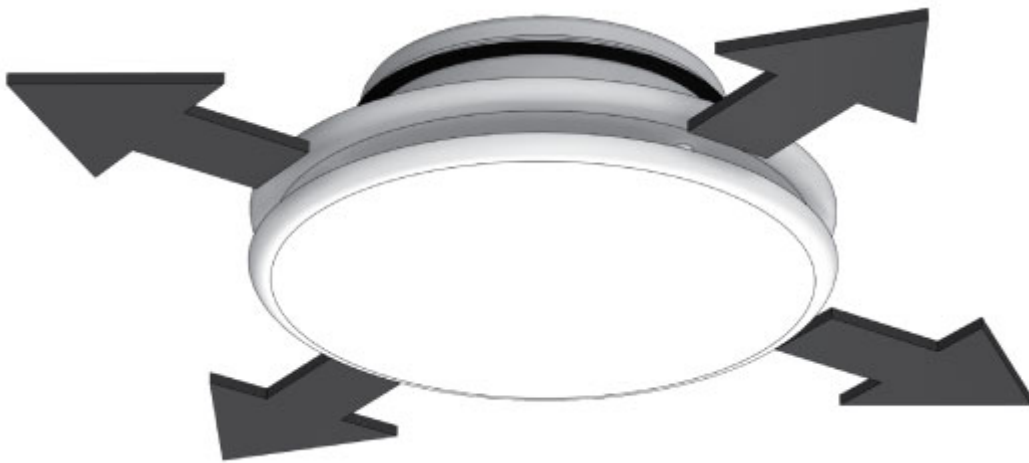

TDM/P

Air is supplied horizontally into the space through the side slots and perforated front panel of the diffuser and mixes with room air in the vicinity of the diffuser. The air jet supplied horizontally through the side slots induces room air and mixed supply air. The recommended maximum air temperature difference between supply and room air is 10 °C degrees.

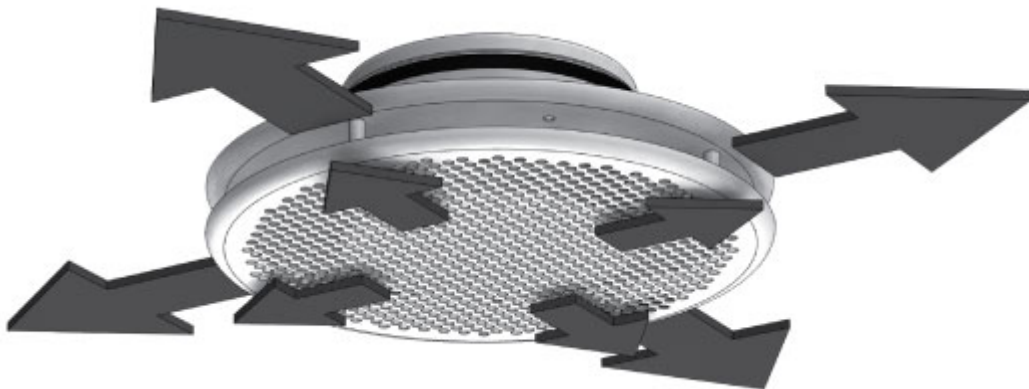

Installation

The diffuser can be connected to the Halton cabin unit by using duct between cabin unit outlet and diffuser in order to reach the false ceiling level. Diffuser can be also connected directly in cabin unit outlet. In this case cabin unit outlet has to be female connection. Diffuser can as well be connected directly to the duct or plenum box.

Servicing

Open the front panel of the diffuser and clean the parts by wiping with a damp cloth. Push the front panel back into place so that the springs lock.

Product Code