





Halton WDD-C 双层百叶风口

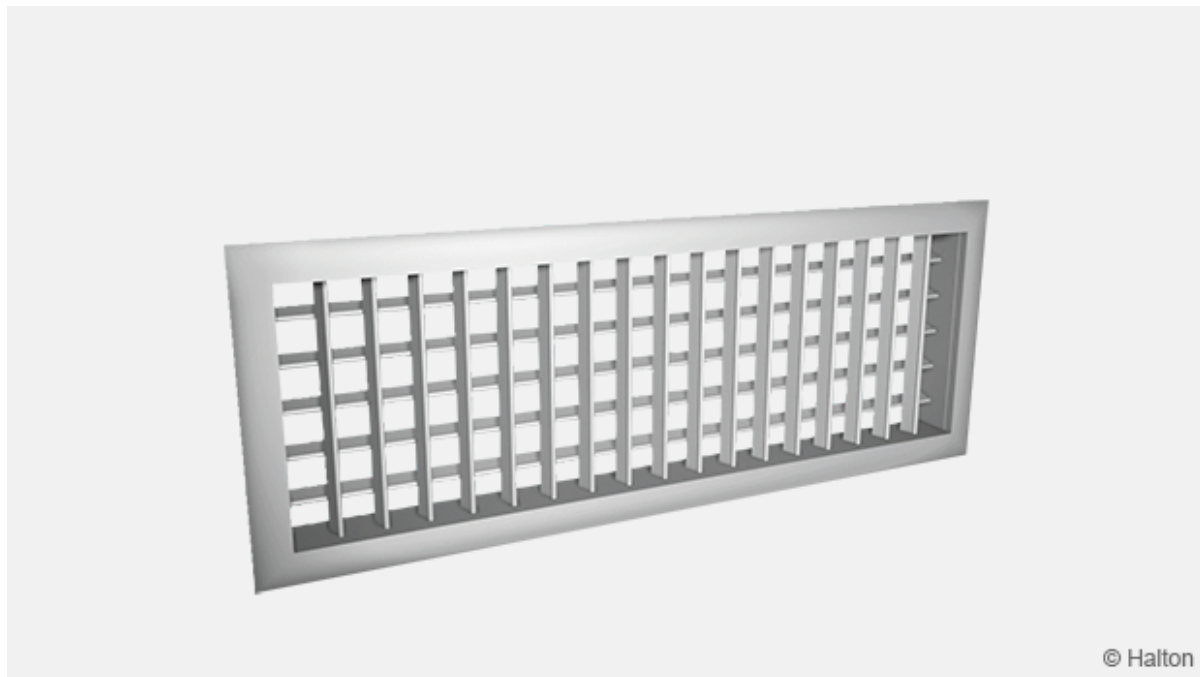

概览Overview

- 风口叶片在0°~180°范围内任意调节，将水平和垂直方向的叶片调节成不同偏转角度，可以得到四个方向不同的送风距离和扩散角
GRILL vanes adjusted between 0°~180°, with horizontal and vertical deflection angle to achieve four direction concerned airflow direction and distance.
- 水平或者垂直安装，用于送风或者排风
Horizontal or Vertical installation, for air supply or exhaust.
- 材料：铝合金型材
Material: Alloy aluminium profile.
- 表面处理：粉末喷涂
Surface treatment: Powder painting
- 可选附件：过滤网/铝制调节阀/静压箱
Optional accessories: polyester filter/aluminium adjustment damper/Plenum

尺寸Dimensions

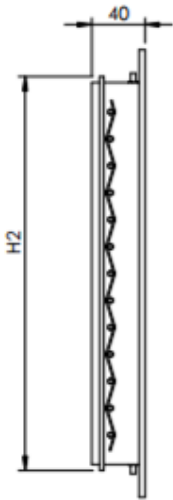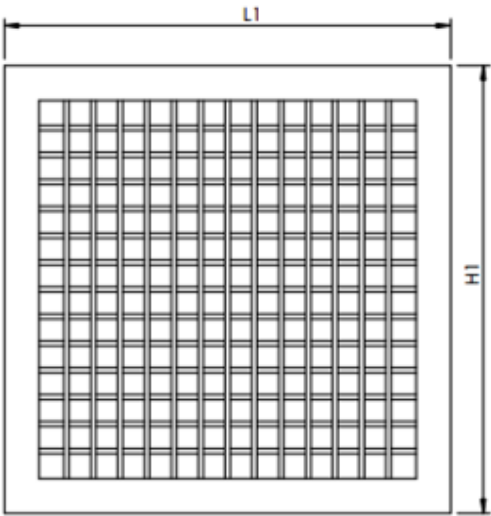

规格Size L x H	L1	H2	L2	H2	可选静压箱 Plenum option	静压箱进风口 Plenum inlet size
200×100	230	130	195	95	(L+60) x (W+60) x 300	Φ100
300×200	330	230	295	195	(L+60) x (W+60) x 300	Φ100
400×200	430	230	395	195	(L+60) x (W+60) x 300	Φ150
400×300	430	330	395	295	(L+60) x (W+60) x 300	Φ150
500×200	530	230	495	195	(L+60) x (W+60) x 300	Φ150
600×300	630	330	595	295	(L+60) x (W+60) x 300	Φ200

700×400	730	430	695	395	(L+60) × (W+60) x 300	Φ200
1000×500	1030	530	995	495	(L+60) × (W+60) x 300	Φ200 × 2
1200×600	1230	630	1195	595	(L+60) × (W+60) x 300	Φ250 × 2
1500×1000	1530	1030	1495	995	(L+60) × (W+60) x 300	Φ250 × 3
2000×1500	2030	1530	1995	1495	(L+60) × (W+60) x 330	Φ300 × 4
2000×1800	2030	1830	1995	1795	(L+60) × (W+60) x 330	Φ300 × 4

安装Installation

确保安装孔尺寸大于等于L x H, 铝合金调节阀可以从正面仰视方向扳动手柄，实现风量调节。与静压箱相连使用可拆卸方式。

Ensure the installation hole size not less than L x H, aluminium adjustment damper can be adjusted from downside to achieve concerned airflow.

Plenum and grill connection is removeable for easy maintenance.

